



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
31.07.2002 Bulletin 2002/31

(51) Int Cl.7: **H04N 5/00**

(21) Application number: **01300430.4**

(22) Date of filing: **18.01.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

• **Thiery, Olivier, Sony Digital Media Europe**  
**1130 Brussels (BE)**

(71) Applicant: **Sony Service Centre (Europe) N.V.**  
**1840 Londerzeel (BE)**

(74) Representative: **Ayers, Martyn Lewis Stanley et al**  
**J.A. KEMP & CO.,**  
**14 South Square,**  
**Gray's Inn**  
**London WC1R 5JJ (GB)**


(72) Inventors:  
• **Skaringer, Lars, Sony Digital Media Europe**  
**1130 Brussels (BE)**

(54) **Method and device for providing downloaded objects to an application**

(57) A method and device for providing downloaded objects to an application including downloading from a received transport stream a module containing an object requested by an application, storing the downloaded module, monitoring whether the stored module is the current version, when the application requests an object of a stored module and the stored module is a current

version, providing the application with the object from the stored module, and when the application requests an object of a stored module and the stored module is not a current version, copying only the objects of the stored module still in use by the application, downloading the current version of the stored module and overwriting the stored module with the downloaded current version of the stored module.

**Fig.2.**

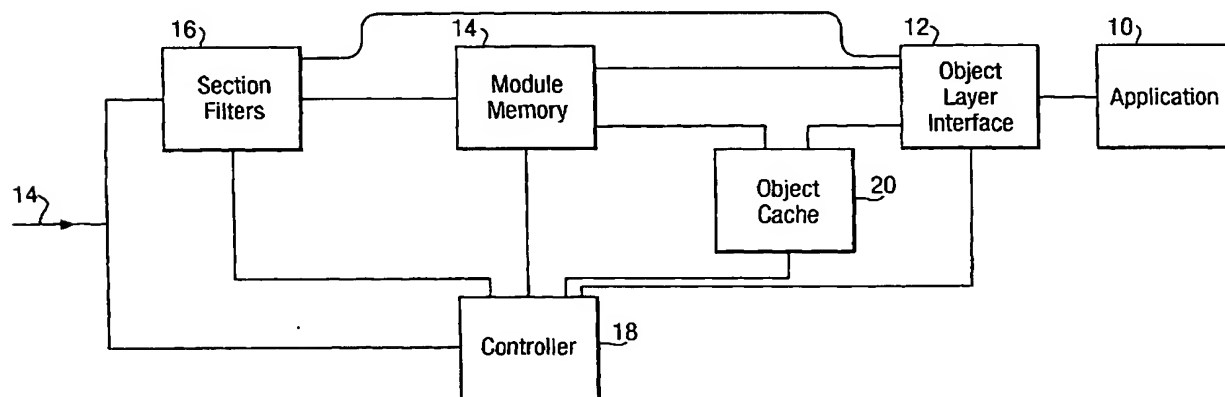

## Description

**[0001]** The present invention relates to a method and device for providing downloaded objects to an application, in particular to downloading information from a transport stream so as to provide on request data objects to an application.

**[0002]** It is known to transmit data objects in a transport stream for downloading by an end user. The objects can include any form of data for use by the end user and can be transmitted in a distributed repetitive form, for instance by means of a data carousel. Often, data objects may be grouped together as data modules such that, for an application of an end user to make use of a particular object, the entire module in which it is contained has to be downloaded from the transport stream. In these circumstances, service providers may group together related objects in respective modules such that, if an end user stores a downloaded module, the access time for the related objects is greatly reduced.

**[0003]** According to the DSM-CC broadcast protocol, objects, such as files, directories, etc, are conveyed to the receivers of end users in the form of BIOP messages carried inside DSM-CC modules. These modules may be broadcast by means of a carousel, each module being reformatted into a plurality of MPEG sections which are broadcast in a distributed form for end users to receive and recombine into the respective modules.

**[0004]** Over time, it is likely that objects will be updated by the service providers. Under these circumstances, it is desirable that, when an application of an end user requests an object, it should receive the latest version of that object. However, if, before the object was updated, the end user had already downloaded the respective module, the application will be provided with the old version of the object as contained in the modules stored by the end user.

**[0005]** It is an object of the present invention to overcome this problem.

**[0006]** According to the present invention, there is provided a method of providing downloaded objects to an application, the method including:

downloading from a received transport stream a module containing an object requested by an application;  
storing the downloaded module;  
monitoring whether the module in the module memory is a current version;  
when the application requests an object of a stored module and the stored module is a current version, providing the application with the object from the stored module; and  
when the application requests an object of a stored module and the stored module is not a current version, copying only the objects of the stored module still in use by the application, downloading the current version of the stored module and overwriting

the stored module with the downloaded current version of the stored module.

**[0007]** According to the present invention, there is also provided a device for providing downloaded objects to an application, the device including:

an object layer interface for downloading from a received transport stream a module containing an object requested by an application;  
a module memory for storing downloaded modules; and  
a controller for monitoring whether the modules in the memory are current versions; wherein  
when the application requests an object contained in a stored module and the stored module is a current version, the object layer interface provides the application with the object from the module memory and, when the application requests an object contained in a stored module and the stored module is not a current version, the object layer interface downloads the current version of the module and overwrites the module stored in the module memory; the device further including:

an object cache for storing objects; wherein  
when the application requests an object contained in a stored module and the stored module is not the current version, before the object layer interface overwrites the stored module with the current version of the stored module, the controller copies into the object cache only the objects of the stored module still in use by the application.

**[0008]** In this way, when an application requests an object, it is always provided with the latest version of that object. However, the application is still able to continue using any objects in the same module which it had previously requested.

**[0009]** As an alternative to the above, when an application requests an object contained in a stored module which is not the current version but which contains other objects already in use by the application, the device could merely download and store the new current version of the module and store it in addition to the previous version of the module. In this way, the application would have access to the current version of the newly requested object whilst maintaining interaction with the previously requested objects. However, this approach is extremely wasteful of memory, particularly where modules contain a large number of objects and an application might be using only one object from a stored module.

**[0010]** Similarly, it is possible for a device to include only an object memory in place of the module memory such that it only stores the objects being used by the application. In this way, whenever a new object is requested by the application, the end user always down-

loads that object from the transport stream and, hence, always obtains the current version. However, this approach severely limits access speeds when related objects are contained together in respective modules and, hence, requested objects can often be retrieved from a previously stored module.

[0011] Thus, the present invention allows applications to be provided with objects with optimum access times, but with minimum memory requirements.

[0012] Since the requests of an application are handled in this way, the application itself need not know the origin of the objects which it uses. The transparent caching of the objects may be achieved by an object layer implemented in hardware or software.

[0013] Preferably, the controller is responsive to information in the transport stream regarding the current versions of modules transmitted in the transport stream.

[0014] In many systems, such as broadcast from DSM-CC carousels, information is sent in the transport stream regarding the updating of modules on the carousel. The controller can monitor this information such that when the application requests an object from an updated module, the controller can take the steps defined above.

[0015] Preferably, the controller monitors whether modules are the current version according to the specifications for MHP platforms.

[0016] Thus, in the context of broadcasts according to the MHP specifications, transparent caching of objects may be provided such that applications are always provided with the most up to date objects.

[0017] Preferably, the objects are DSM-CC objects and the modules are DSM-CC modules.

[0018] Hence, the present invention may be used in conjunction with DSM-CC systems.

[0019] Preferably, the objects are copied from the module memory to the object cache by copying the corresponding BIOP messages.

[0020] Since DSM-CC objects are contained within DSM-CC modules as BIOP messages, the object cache can store the objects in their BIOP message form.

[0021] Preferably, at least one filter is provided for filtering out the transport stream packets of a module to be downloaded.

[0022] This may be achieved by filtering out the sections of a module to be downloaded, for instance MPEG-2 sections. Hence, packets, such as MPEG packets, in the transport stream are checked to determine whether or not they relate to a module to be downloaded. All of the relevant packets are copied from the transport stream by the section filter such that they may be re-assembled to form the module.

[0023] Preferably, the device is a television device. Hence, the invention may be embodied in television devices, such as integrated televisions and set top boxes, for receiving additional television services.

[0024] Preferably, the device is MHP compliant.

[0025] It will be appreciated that the invention can be

implemented in software and recorded on a storage medium. Indeed, a device already configured to download modules for requested objects could be supplemented by an appropriate object layer such that, in accordance with the present invention, when the application requests an object of a stored module and the stored module is not a current version, objects of the stored modules still in use by the application are copied. The object layer provides the transparent caching such that the application may continue to use the copied objects without any knowledge of the copying or changes in memory addressing.

[0026] The invention will be more clearly understood from the following description, given by way of example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates a module based DSM-CC client stack;

Figure 2 illustrates schematically a device embodying the present invention;

Figure 3 illustrates a flow chart for a process embodying the present invention; and

Figures 4(a), (b), (c) and (d) illustrate an update scenario.

[0027] The present invention will be described with reference to an embodiment for use according to the DSM-CC broadcast protocol. However, it will be appreciated that it is applicable to any system in which objects for use with end user applications are transmitted together in modules.

[0028] According to the DSM-CC broadcast protocol, objects, such as files and directories, are conveyed to end user receivers in the form of BIOP messages, themselves carried inside Data Carousel modules. One such module can and usually does contain several BIOP messages. In this regard, service providers usually group together related BIOP messages in the same module.

[0029] Thus, as a consequence of this nature of DSM-CC object carousels, DSM-CC client stacks, i.e. the software layer stack implemented in the receiver to handle downloaded data, are often implemented as "module based". In other words, data downloaded from a received transport stream is kept at a module level, i.e. in the form of the received modules, rather than as original objects or BIOP messages.

[0030] By storing the received data at module level in the form of the modules as received, it is possible to improve on the access speed achievable by the end user device. In particular, since related objects are normally grouped together in the same module, it is advantageous to keep the entire module in memory. This is because a user application which has requested one object from a module is likely to request other objects from the same module. If that module is kept in memory, clearly, the application can access it more quickly than

if it has to be retrieved from the transport stream.

**[0031]** Figure 1 illustrates a module based DSM-CC client stack for operation as described above.

**[0032]** As client layer 2, in which an end user application may be running, is able to request DSM-CC objects by means of opaque references, such as index number, data address, etc.

**[0033]** The user to user layer 4 then provides a high level representation of any BIOP messages. This layer implements any operations which the client application can invoke, such as read file, list directory, etc. It interfaces with the object carousel layer so as to request BIOP messages to be loaded (or unloaded) according to the requests for objects made by the application in the client layer.

**[0034]** The object carousel layer 6 maintains any BIOP messages and provides basic BIOP message access routines to the user to user layer 4. In order to obtain appropriate BIOP messages according to the needs of the application in the client layer 2, the object carousel layer 6 interfaces with the data carousel layer 8 in order to request the loading or closing of data carousel modules.

**[0035]** The data carousel layer 8 is the lowest layer of the client stack and is responsible for assembling the data carousel modules. Thus, when a particular module is required in order to provide a requested object to the application in the client layer 2, the data carousel 8 sets up appropriate section filters to extract MPEG-2 sections carrying the DSM-CC messages relevant to the required module. It is also possible for the data carousel layer 8 to remove filters when they are no longer required.

**[0036]** The approach of storing an entire module when that module is downloaded from the transport stream to provide a particular object to an application could be described as "module-based caching". This approach gives rise to problems when dealing with dynamic content, i.e. objects whose contents change over time. In particular, where an object is requested by an application and that object is contained in a module which is already available in cache on the device, if the content of the object is subject to change, there is no guarantee that the object in cache is the current version.

**[0037]** It is clearly desirable that an application always receives the latest version of an object. Indeed, according to the MHP specification, the DSM-CC stack must return the object which corresponds to the latest available version on the transport stream. This behaviour is known as "transparent caching". In order to implement transparent caching, it would seem that a module which is already stored in cache may at any given point in time need to be reloaded from the broadcast transport stream. The problem arises that where a reference already exists to that module, for instance the application in the client layer 2 is using at least one of the objects from that module, these references must still remain valid. Thus, if an application in the client layer 2 is using

one or more objects from the module, the application must be able to continue to use the data of those objects without change. In particular, if an application is already running on the basis of the data contained in a particular object, that data cannot be allowed to change mid way through the operations being conducted by the application. Thus, it would seem that the old version of a module needs to be kept when a new version is loaded from the broadcast stream.

**[0038]** By letting the data carousel layer 8 maintain several versions of the same module, a considerable loss in memory efficiency occurs, since outdated object data which is not being used has to be kept in memory unnecessarily. Furthermore, with this arrangement, the complexity of the lower layers of the client stack (data carousel client implementation) would require increased complexity.

**[0039]** As an alternative, the DSM-CC client could be implemented in a manner which is object based. In other words, rather than caching loaded modules, only the objects requested by the application in the client layer 2 would be cached. This could be described as an object-based caching approach. This will easily cater for the transparent caching discussed above. However, since all new references to objects will require downloading of modules from the broadcast stream, operation of the application in the client layer 2 will be much slower.

**[0040]** Figure 2 illustrates schematically a device allowing these problems to be overcome. Of course, in practice, this device is likely to be implemented in software having the form of the client stack described with reference to Figure 1.

**[0041]** As will be discussed below, the DSM-CC client is implemented as a hybrid between the two caching approaches discussed above. In particular, whenever a module is discovered to be an old version, in other words out of date, the DSM-CC stack copies only the data which needs to be kept, i.e. the referenced objects or more likely in practice BIOP messages, and then releases the module.

**[0042]** According to the request of an application 10 for a particular object, an object layer interface 12 searches a module memory 14 for the corresponding module containing the BIOP message for the requested object. In practice, a register may be kept of the previously downloaded modules being stored.

**[0043]** If the appropriate module is not already stored in the module memory 14, then steps are taken to download the required data from a received broadcast transport stream 14. In particular, one or more section filters 16 may be used to extract from the stream 14 sections required to reconstruct the desired module. For instance MPEG section filters may be used to extract MPEG-2 sections carrying the required DSM-CC module.

**[0044]** When the desired module is received, the originally requested object contained in that module is provided by the object layer interface 12 to the application 10. The entire module is also stored in the module mem-

ory 14.

**[0045]** A controller 18 is also provided. It will be appreciated that this is a schematic representation of a function which may be contained within the overall operation of the device.

**[0046]** The controller 18 is sensitive to data in the broadcast transport stream 14 and determines when modules available over the stream 14 have been updated. In this way, the controller 18 may determine whether or not modules stored in the module memory 14 are current or old versions. As illustrated, the controller 18 derives this version information directly from the broadcast transport stream 14. However, as mentioned above, this representation is schematic and, in practice, this information may be derived by means of an appropriate section filter.

**[0047]** As will be discussed below in further detail, when the controller determines that a module stored in the module memory 14 is now available in a new version, it can initiate downloading of that new version from the broadcast transport stream 14. This downloading can be initiated as soon as the new version is detected or only once the object layer interface 12 attempts to access an object contained in that module.

**[0048]** Where the application 10 is already using one or more objects contained in the module to be updated, the controller 18 first copies the objects or corresponding BIOP messages to an object cache 20. The object layer interface 12 is informed of this copying such that the application 10 may continue to use the data of the objects without knowledge of the transfer of data. In other words, the object layer interface can handle any re-addressing required such that the application 10 retrieves data from the object cache 20 rather than the module memory 14.

**[0049]** In this way, any objects currently in use are maintained in the object cache, but modules are updated with their new current versions such that new references to any objects contained in those modules are always references to the latest version of the object.

**[0050]** As mentioned above, the controller can update the module memory as soon as a new version of a module appears or, alternatively, can update the module only when the application 10 attempts to make reference to an object within that module. A module might be updated as soon as a new version is available on the basis that the application 10 is already referring to at least one object in that module and, hence, is likely to wish to refer to other objects of that module in the future. By updating the module as soon as the new version is available, future access times are likely to be reduced. On the other hand, updating the module whenever the new version appears may be considered to be unnecessary processing in some environments, since the application 10 may not require reference to any further objects of that module.

**[0051]** Thus, if a module is being updated, objects which are still open will be cached at an object level rather

than at a module level. Only the latest available version of a module will be kept in the system memory at a given time. This means that only important, i.e. potentially useful, data is ever kept in cache by the DSM-CC stack. In this way, the mechanism combines the speed of a module-based cache with the memory efficiency of an object-based cache. The client layer 2 and any application 10 in the client layer 2 never directly accesses the object data, since the copying of the object or BIOP message into the object cache 20 will change the object data location in memory. The object carousel layer 6 as represented by the object layer interface 12 provides the layer of insulation that guarantees this behaviour.

**[0052]** The process is illustrated in the flow diagram of Figure 3.

**[0053]** In step 100, a request is made to load a DSM-CC object. As a result of this, the module parameters are found for the module corresponding to the requested DSM-CC object in step 102. Thus, the system can maintain an appropriate database of parameters so as to determine the required module.

**[0054]** In step 104, it is determined whether the module is in cache, for instance whether it is stored in the module memory 14.

**[0055]** If the module has not been previously downloaded and, hence, has not been stored, then the process proceeds to step 106 in which the module is loaded and stored in cache. Then, in step 108 the required data for the requested DSM-CC object is returned to the application.

**[0056]** If, in step 104, it is determined that the required module is not in cache, then the process proceeds to step 110. At this step, it is determined whether or not the desired module in cache is the latest version of that module. If it is, the process may proceed to step 108 and return the object data to the application.

**[0057]** If step 110 determines that the module in cache is not the latest version, then the process proceeds to step 112. In this step, any referenced objects, i.e. objects already referenced by the application, which are contained within the cached module are then saved, for instance by copying them to the object cache 20.

**[0058]** In step 114, the memory used by the module is then freed such that the process may proceed to step 106 to load the required module.

**[0059]** It should be appreciated that, as mentioned above, rather than awaiting a request for the object of a module, the process can alternatively conduct steps 110, 112, 114 and 106 continuously so as to ensure that the latest version of the downloaded module is always available.

**[0060]** A particular scenario will now be described with reference to Figures 4(a) to (d).

**[0061]** In this scenario, an application has open references to two objects which are conveyed in the same module. The objects are both of version N. The version currently available on the stream is N + 1. However, at the time, the application is not aware of this.

**[0062]** In Figure 4(a), it is illustrated that the application references object 1 and object 2 by means of BIOP message 1 and BIOP message 2 of version N of the required module.

**[0063]** In Figure 4(b), the application requests object 3. At this time, the data carousel layer checks the version available on the stream and discovers version N + 1.

**[0064]** As illustrated in Figure 4(c), the data carousel layer notifies the object carousel layer that a new version of the module is available on the stream. The object carousel layer therefore copies all BIOP messages which it references from the module and closes all accesses to it.

**[0065]** The new version of the module can now safely be loaded and, as illustrated in Figure 4(d), with loading completed, object 3 now accesses the latest version with object 1 and object 2 still accessing the previous version.

## Claims

1. A device for providing downloaded objects to an application, the device including:

an object layer interface for downloading from a received transport stream a module containing an object requested by an application; a module memory for storing downloaded modules; and a controller for monitoring whether the modules in the module memory are current versions; wherein

when the application requests an object contained in a stored module and the stored module is a current version, the object layer interface provides the application with the object from the module memory and, when the application requests an object contained in a stored module and the stored module is not a current version, the object layer interface downloads the current version of the module and overwrites the module stored in the module memory; the device further including:

an object cache for storing objects; wherein

when the application requests an object contained in a stored module and the stored module is not the current version, before the object layer interface overwrites the stored module with the current version of the stored module, the controller copies into the object cache only the objects of the stored module still in use by the application.

2. A device according to claim 1 wherein the controller is responsive to information in the transport stream regarding the current versions of the modules transmitted in the transport stream.

3. A device according to claim 1 or 2 wherein the controller monitors whether modules are the current version according to the specifications for MHP platforms.

4. A device according to claim 1, 2 or 3 wherein the objects are DSM-CC objects and the modules are DSM-CC modules.

5. A device according to claim 4 wherein the objects are copied from the module memory to the object cache by copying the corresponding BIOP messages.

6. A device according to any preceding claim further including at least one filter for filtering from the transport stream packets of a module to be downloaded.

7. A device according to any preceding claim wherein the device is a television device.

8. A device according to any preceding claim wherein the device is MHP compliant.

9. A method of providing downloaded objects to an application, the method including:

downloading from a received transport stream a module containing an object requested by an application;

storing the downloaded module;

monitoring whether the stored module is the current version;

when the application requests an object of a stored module and the stored module is a current version, providing the application with the object from the stored module; and

when the application requests an object of a stored module and the stored module is not a current version, copying only the objects of the stored module still in use by the application, downloading the current version of the stored module and overwriting the stored module with the downloaded current version of the stored module.

10. A computer readable storage medium having recorded thereon code components that, when loaded on a computer and executed, will cause that computer to operate according to any one of the preceding claims.

Fig.1.

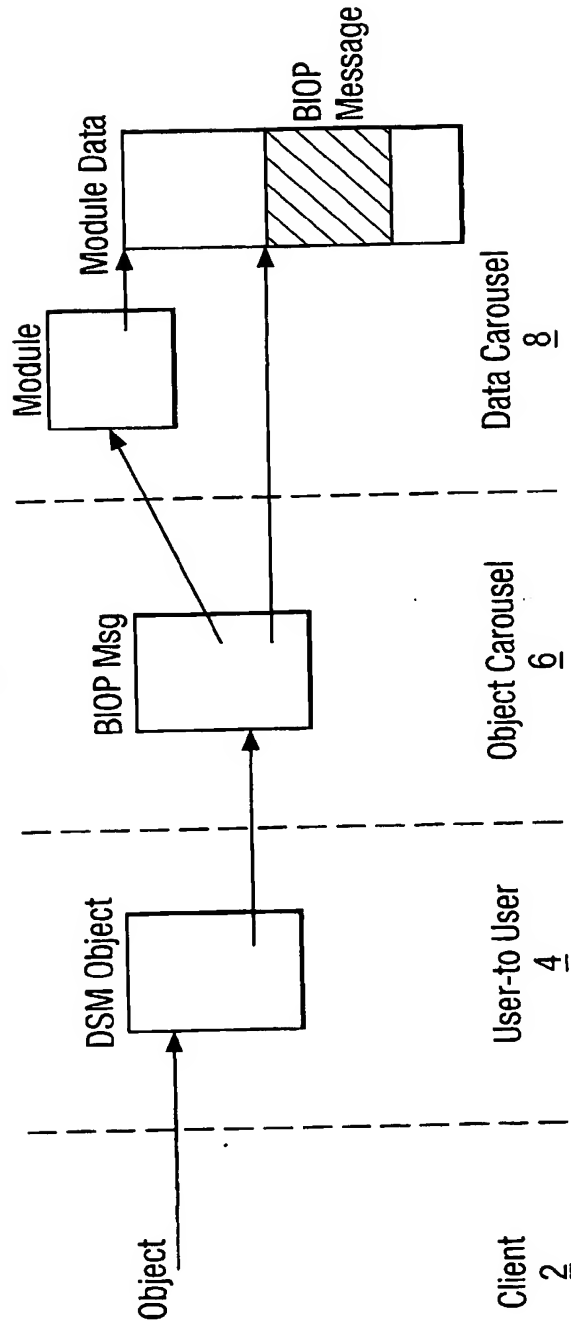


Fig.2.

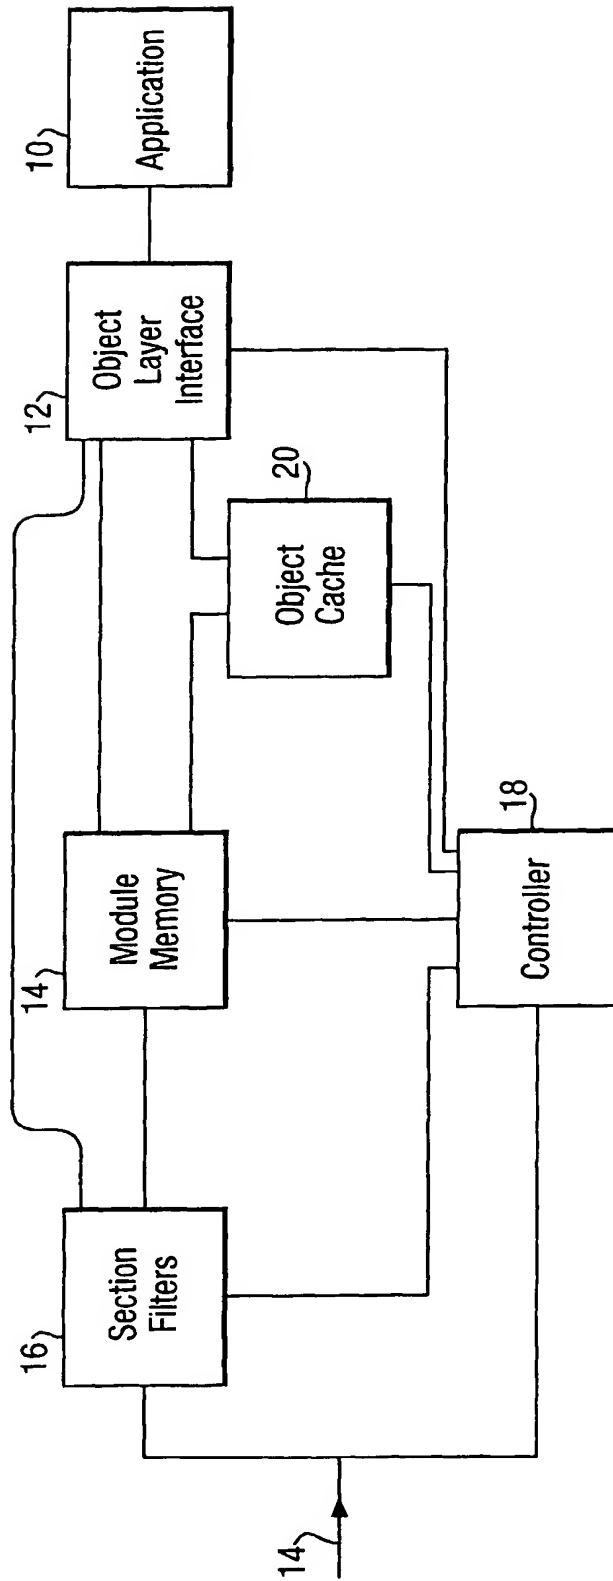




Fig.3.

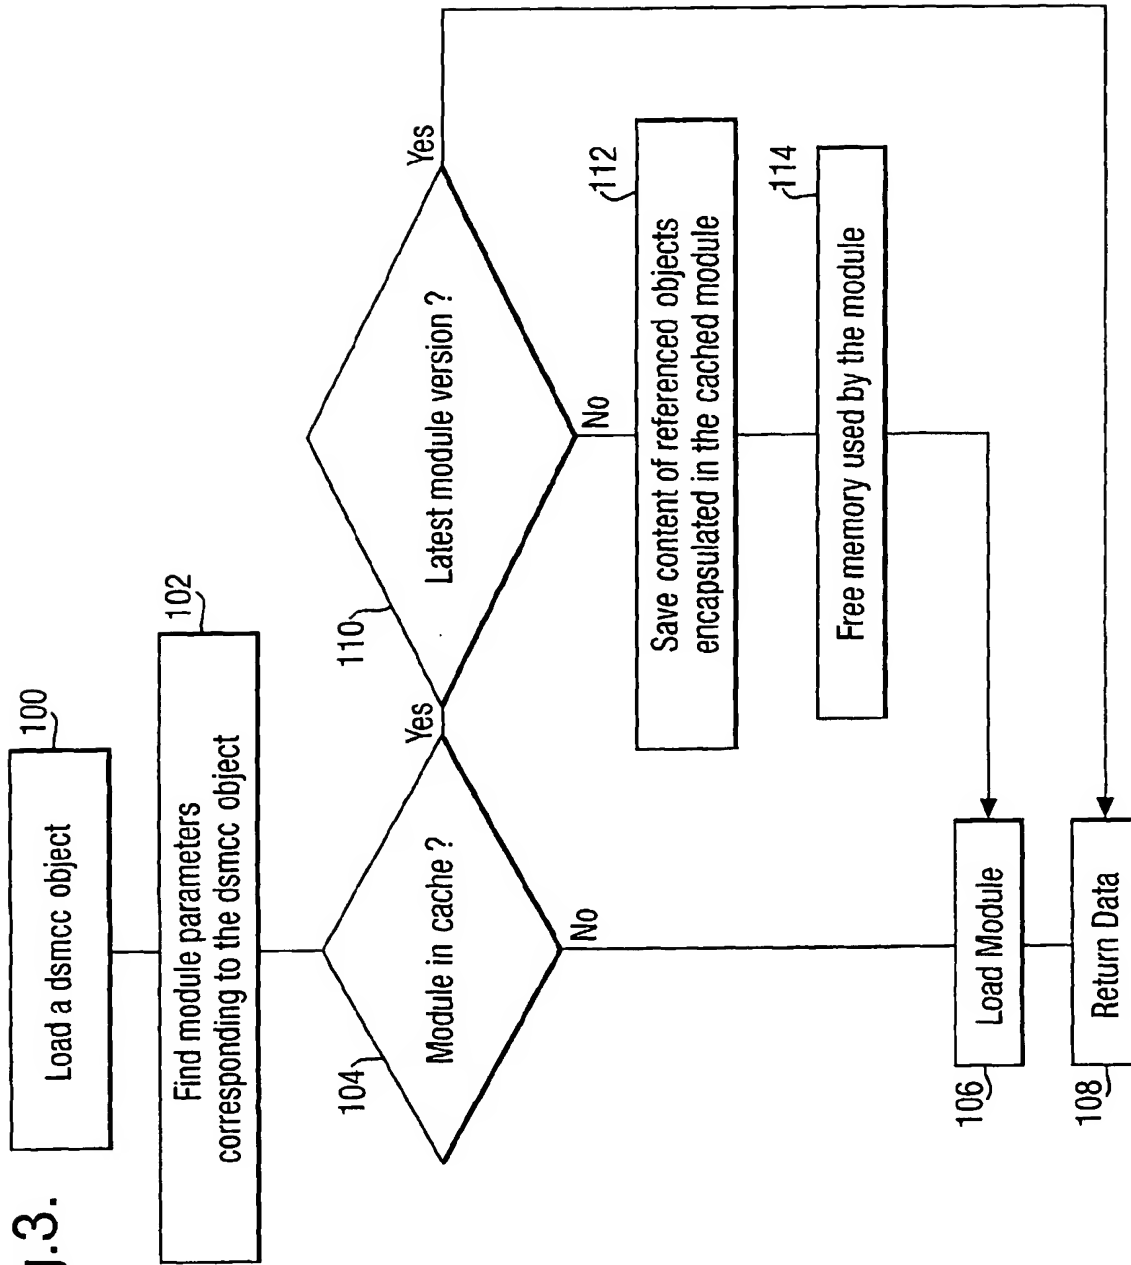


Fig. 4(a).

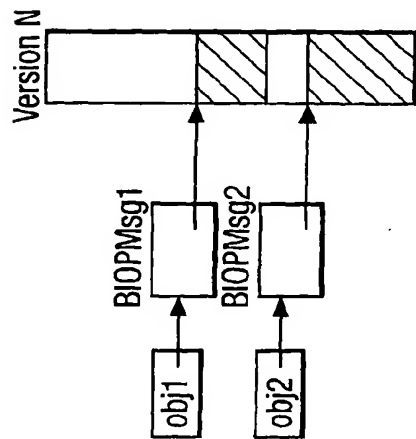


Fig. 4(b).

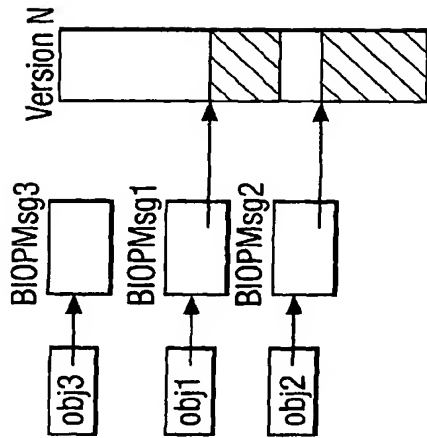


Fig. 4(c).


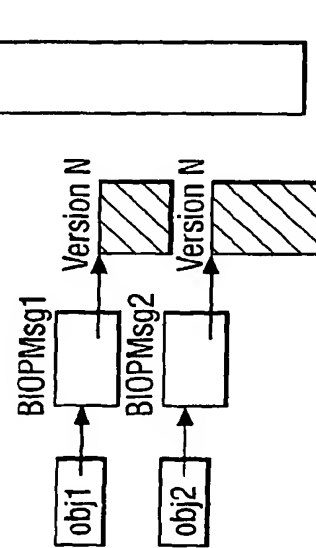


Fig. 4(d).



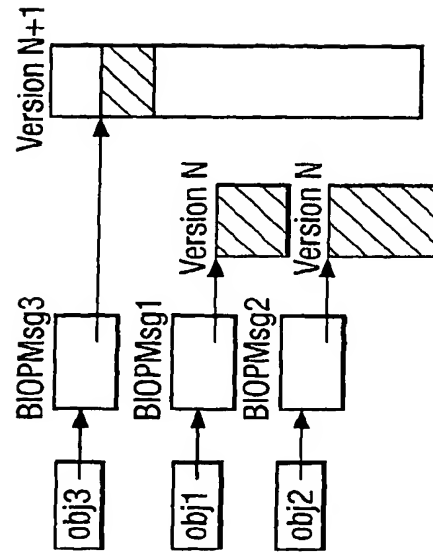

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 0430

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 619 250 A (MCCLELLAN STEPHEN R ET AL) 8 April 1997 (1997-04-08) * abstract *	1-3,7-10	H04N5/00
Y	* column 4, line 39 - line 59 * * column 5, line 10 - line 19 * * column 6, line 65 - column 7, line 35 * * column 8, line 12 - line 23 * * claims 1,2,6,7,10,15,16,20 *	4-6	
Y	WO 99 65230 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS SVENSKA AB (SE)) 16 December 1999 (1999-12-16) * the whole document *	4-6	
A	US 6 148 081 A (CHARI SURESH N ET AL) 14 November 2000 (2000-11-14) * abstract * * column 1, line 58 - column 2, line 20 * * column 4, line 33 - line 41 * * column 6, line 50 - column 7, line 20; figure 3 * * column 8, line 6 - line 54 *	1-10	
A	MEYER-BOUDNIK T ET AL: "MHEG EXPLAINED", IEEE MULTIMEDIA, IEEE COMPUTER SOCIETY, US, VOL. 2, NR. 1, PAGE(S) 26-38 XP000500084 ISSN: 1070-986X * the whole document *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04N H04L
A	US 5 635 979 A (HUDSON JR HENRY G ET AL) 3 June 1997 (1997-06-03) * abstract * * column 4, line 43 - column 5, line 39 * * column 9, line 24 - line 43 * * column 11, line 1 - line 24 *	1,9	
-/--			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 August 2001	Examiner Beaudet, J-P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date U : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM : 503 03.82 (PC-C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 0430

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EVAIN J -P: "THE MULTIMEDIA HOME PLATFORM", EBU REVIEW-TECHNICAL, BE, EUROPEAN BROADCASTING UNION. BRUSSELS, NR. 275, PAGE(S) 4-10 XP000767493 ISSN: 0251-0936 * the whole document *	3,8	
A	LADEBUSCH U: "EINFUEHRUNG IN DEN DVB-DATENRUNDFUNK", FERNSEH UND KINOTECHNIK, VDE VERLAG GMBH. BERLIN, DE, VOL. 52, NR. 7, PAGE(S) 425-432 XP000870644 ISSN: 0015-0142 * the whole document *	4-6	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>3 August 2001</b>	Examiner <b>Beaudet, J-P</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 0430

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-08-2001

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5619250	A	08-04-1997	NONE		
WO 9965230	A	16-12-1999	CN	1277778 T	20-12-2000
			EP	1034653 A	13-09-2000
US 6148081	A	14-11-2000	US	6038319 A	14-03-2000
			AU	4204399 A	20-12-1999
			BR	9910796 A	13-02-2001
			EP	1080582 A	07-03-2001
			WO	9963757 A	09-12-1999
US 5635979	A	03-06-1997	AU	2657995 A	21-12-1995
			WO	9533338 A	07-12-1995
			US	5666293 A	09-09-1997
			US	5768539 A	16-06-1998
			US	5978855 A	02-11-1999

EPO FORM P0453

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



European Patent Office  
80298 MUNICH  
GERMANY  
Tel.: +49 89 2399 - 0  
Fax: +49 89 2399 - 4465

Europäisches  
Patentamt

Europ  
Patent Office

Office européen  
des brevets

FIPA 4-58

Müller - Hoffmann & Partner  
Patentanwälte,  
Innere Wiener Strasse 17  
81667 München  
ALLEMAGNE



EPO Customer Services

Tel.: +31 (0)70 340 45 00

E I N G E G A N G E N  
MÜLLER - HOFFMANN & PARTNER

15. März 2007

Frist .....

Date

15.03.07

Reference  
56254 Mü/rs

Application No./Patent No.  
04022530.2 - 2223

Applicant/Proprietor  
SHARP KABUSHIKI KAISHA

### COMMUNICATION

The European Patent Office herewith transmits as an enclosure the European search report (under R. 44 or R. 45 EPC) for the above-mentioned European patent application.

If applicable, copies of the documents cited in the European search report are attached.

- ☒ Additional set(s) of copies of the documents cited in the European search report is (are) enclosed as well.

The following specifications given by the applicant have been approved by the Search Division :

- ☒ Abstract ☐ Title
- ☐ The abstract was modified by the Search Division and the definitive text is attached to this communication.

The following figure will be published together with the abstract : 2

### Refund of search fee

If applicable under Article 10 Rules relating to fees, a separate communication from the Receiving Section on the refund of the search fee will be sent later.





DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	ATSC: "Transport Stream File System Standard, A/95" ATSC STANDARD, no. A/95, 25 March 2003 (2003-03-25), pages 1-59, XP002422256 Washington, DC, US * page 48 - page 56; figure B6 *	1-47	INV. H04N7/24 H04N7/26
Y	"Digital Video Broadcasting (DVB); Multimedia Home Platform (MHP) Specification 1.0.3" ETSI TS 101812 V.1.3.1, June 2003 (2003-06), page 1-27,295-328, XP002422257 ETSI, Sophia-Antipolis, FR * page 295 - page 306 *	1-47	
Y	LADEBUSCH U: "EINFUEHRUNG IN DEN DVB-DATENRUNDFUNK" FKT FERNSEH UND KINOTECHNIK, FACHVERLAG SCHIELE & SCHON GMBH., BERLIN, DE, vol. 52, no. 7, July 1998 (1998-07), pages 425-432, XP000870644 ISSN: 1430-9947 * pages 428-431, paragraph 2 *	1-47	TECHNICAL FIELDS SEARCHED (IPC) H04N
Y	CARSTEN HERPEL: "Elementary Stream Management in MPEG-4" IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 9, no. 2, March 1999 (1999-03), XP011014552 ISSN: 1051-8215 * pages 315-322, paragraphs I,II,IV,V *	1-47	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 February 2007	Examiner Güttlich, Jürgen
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
Y	ELEFThERIADIS A ED - WONG P W ET AL: "MPEG-4 systems: architecting object-based audio-visual content" MULTIMEDIA SIGNAL PROCESSING, 1998 IEEE SECOND WORKSHOP ON REDONDO BEACH, CA, USA 7-9 DEC. 1998, PISCATAWAY, NJ, USA, IEEE, US, 7 December 1998 (1998-12-07), pages 535-540, XP010318325 ISBN: 0-7803-4919-9 * pages 536-538, paragraphs 1.,3.; figure 2 *	1-47	
Y	EP 1 227 667 A (SONY SERVICE CT EUROP N V [BE]) 31 July 2002 (2002-07-31) * paragraphs [0001] - [0005], [0015] - [0024], [0037], [0043] *	12,13, 24,37,47	
A	"INFORMATION TECHNOLOGY - GENERIC CODING OF MOVING PICTURES AND ASSOCIATED AUDIO INFORMATION - PART 6: EXTENSIONS FOR DSM-CC" ISO/IEC 13818-6:1998(E), XX, XX, 1 October 2002 (2002-10-01), pages 1-604, XP008058246 * page 285, paragraph 9.2 - page 290, paragraph 9.3 * * page 303, paragraph 11.1 - page 318, paragraph 11.4 *	1-47	TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 February 2007	Examiner Güttlich, Jürgen
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 04 02 2530

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-02-2007

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1227667	A	31-07-2002	CN 1366244 A	28-08-2002
			JP 2002314895 A	25-10-2002
			KR 20020062184 A	25-07-2002
			US 2002107995 A1	08-08-2002
<hr/>				

Bitte beachten Sie, dass angeführte Nichtpatentliteratur (wie z. B. wissenschaftliche oder technische Dokumente) je nach geltendem Recht dem Urheberrechtsschutz und/oder anderen Schutzarten für schriftliche Werke unterliegen könnte. Die Vervielfältigung urheberrechtlich geschützter Texte, ihre Verwendung in anderen elektronischen oder gedruckten Publikationen und ihre Weitergabe an Dritte ist ohne ausdrückliche Zustimmung des Rechtsinhabers nicht gestattet.

Veuillez noter que les ouvrages de la littérature non-brevets qui sont cités, par exemple les documents scientifiques ou techniques, etc., peuvent être protégés par des droits d'auteur et/ou toute autre protection des écrits prévue par les législations applicables. Les textes ainsi protégés ne peuvent être reproduits ni utilisés dans d'autres publications électroniques ou imprimées, ni rediffusés sans l'autorisation expresse du titulaire du droit d'auteur.

Please be aware that cited works of non-patent literature such as scientific or technical documents or the like may be subject to copyright protection and/or any other protection of written works as appropriate based on applicable laws. Copyrighted texts may not be copied or used in other electronic or printed publications or re-distributed without the express permission of the copyright holder.